

Air Water Separator for Compressed Air

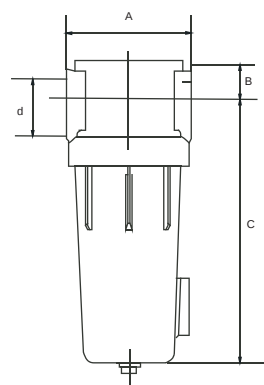
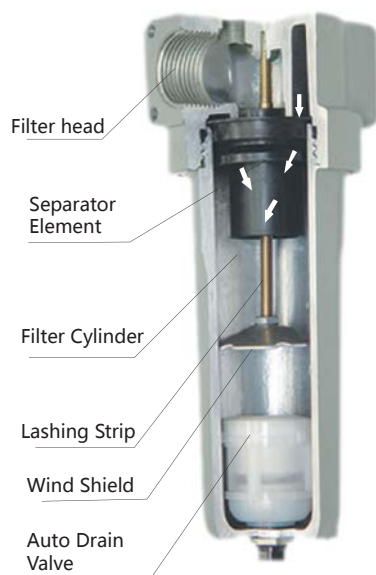


Fig 1: Aluminum Alloy Casting With Built-In Auto Drain Valve

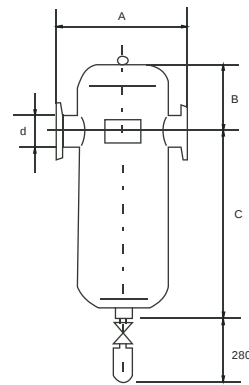


Fig 2: Carbon Steel Casting External Type Auto Drain Valve.

Parameters:

Max Working Pressure : 1.6MPa Drainage Efficiency : $\leq 99\%$ Working Temperature : 66°C

Part No.	Fig	Flow Rate m^3/min (0.7MPa)	Inlet/outlet connector Dimensions	Dimensions (mm)			Material
				A	B	C	
AW 0150	1	1.5 ~ 2.4	G $1\frac{1}{2}$	89	26	166	Aluminum Alloy
AW 0216	1	2.5 ~ 3.6	G $3\frac{3}{4}$	89	26	166	
AW 0270	1	3.7 ~ 5.4	G1	89	26	166	
AW 0270A	1	3.7 ~ 5.4	M33 X 2	89	26	166	
AW 0450	1	5.5 ~ 8.6	G1 $1\frac{1}{4}$	120	41	256	
AW 0540	1	8.7 ~ 13	G1 $1\frac{1}{2}$	120	41	256	
AW 1200	1	14 ~ 29	G2	160	51	413	Aluminum Filter Head Stainless Steel Filter Cylinder
AW1200A	1	14 ~ 29	M60 X 2	160	51	413	
AW 2400	1	30 ~ 40	G2 $1\frac{1}{2}$	216	65	660	
AW 3000	1	41 ~ 50	G3	216	65	750	Carbon Steel
AW 2520	2	30 ~ 42	DN 80	450	180	620	
AW 3300	2	43 ~ 55	DN 100	510	210	660	
AW 4080	2	56 ~ 68	DN 125	580	280	830	
AW 4800	2	69 ~ 80	DN 150	750	300	910	

Remarks: 1. 1.6 Mpa above and other type separator can also be customized

2. Any dimensions are subject to change without notice.